


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	ADDED METRIC IDENTIFICATION METHOD	04-05-11	BRH
B	REMOVED BLUE DOT INSTRUCTION	10-21-15	RAS
C	UPDATED DIMENSIONS AND DESCRIPTIONS	02-02-16	RAS
D	UPDATED CURRENT RATING	06-02-16	RAS
E	UPDATED MAXIMUM AMPERAGE RATING	30JAN17	RAS

P/N 3874-000 #8 x 3/8 PHILLIPS FLAT HEAD HIGH-LOW SCREW STAINLESS STEEL (2 PLCS.)

METRIC IDENTIFICATION (YELLOW DOT) 4 PLCS.

344008N02 BASEPLATE

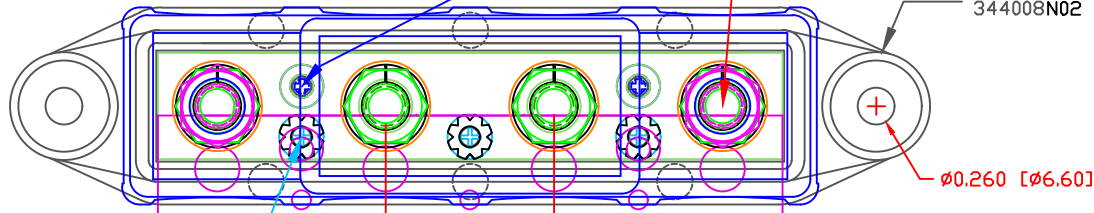

P/N 3870-000 8-32 x 5/16 SEMS SCREW W/ EXTERNAL TOOTH WASHER (3 PLCS)

1.184 [30.07]

P/N 3731-001 M8 x 1.25 x 30 FULLY THREADED STAINLESS STEEL BOLT (4 PLCS.)

P/N 3846-000 M8 x 1.25 HEAVY JAM NUT 18-8 STAINLESS STEEL (4 PLCS.)


P/N 3638-002 18-8 STAINLESS STEEL LOCK WASHER (4 PLCS.)

P/N 3643-001 18-8 STAINLESS STEEL FLAT WASHER (4 PLCS.)

P/N 3885-001 5/16" CONTACT PLATE

1.385 [35.19]

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOLDED PRODUCTS ONLY: ±.030"/±0.8mm
HARDWARE ITEMS: ±0.010"/±0.25mm

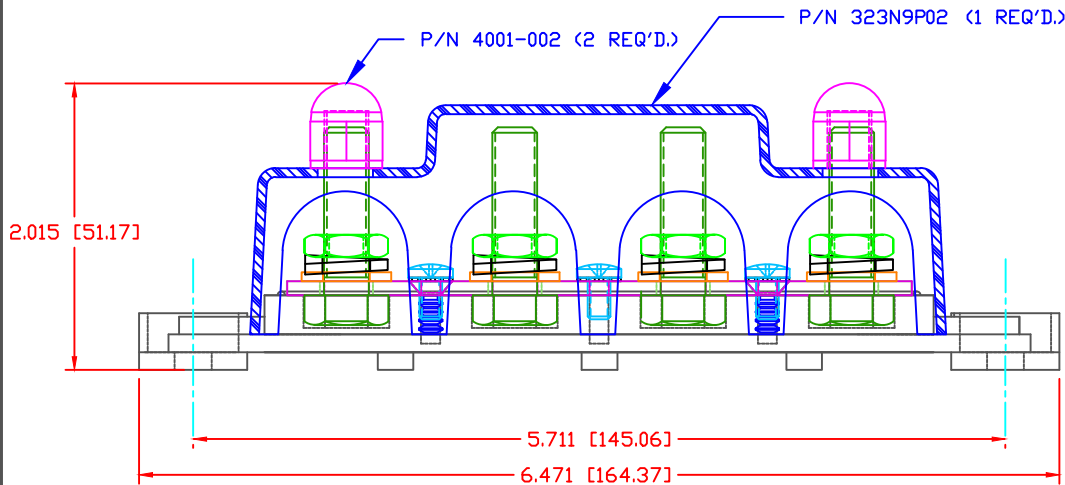

MATERIAL PART NO: 7111210502
 MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: DURETHANE BKV 15 H 3.0 00000
 SPECIFIC GRAVITY: 1.23
 MELTING POINT DEGREES C: 213
 MELTING POINT DEGREES F: 415

INCLUDES COVER P/N 723 AND ASSEMBLY P/N 74008N0
 MAXIMUM RECOMMENDED FASTENER TORQUE: 12 FT./LBS. (144 IN./LBS.)
 (ANTI-SEIZE RECOMMENDED)

MAXIMUM RECOMMENDED AMPERAGE: 250 AMPS @ 12VDC

*			
REF:	DATE:	DRN BY: BRH	WEIGHT:
CUSTOMER DIMS	08-16-10	CHK'D BY: BRH	.458LBS [207.80G]
TITLE: BUSBAR, 4 POINT, M8 W/ COVER, RED			SCALE: NONE
MATERIAL: GLASS-FILLED NYLON		PART NO.	
COLOR: RED		74008N1N02	
		DRG CLASS	REV E